

A cross-sectional view of a multi-layered material. The top layer consists of a series of rectangular blocks, some of which are labeled 12, 13, 14, and 15. A bracket labeled 16 spans the top layer. Below the top layer is a layer with diagonal hatching, labeled 17. The bottom layer is a solid black layer, labeled 11.

Fig. 1 is a schematic diagram of a circular device. It features a central rectangular component labeled 15, surrounded by concentric circles. The outermost circle is dashed and labeled H. The innermost circle is solid and labeled 13. The device is mounted on a base with two horizontal sections labeled 16 and 17. Arrows indicate a clockwise rotational direction around the central component.

Approved
Special

FIG.5



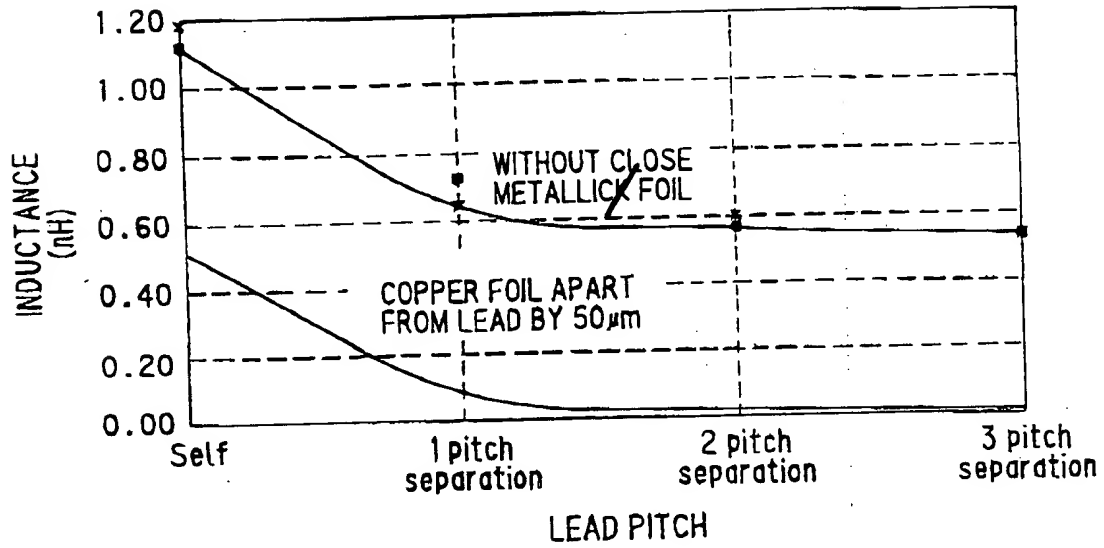


FIG.6

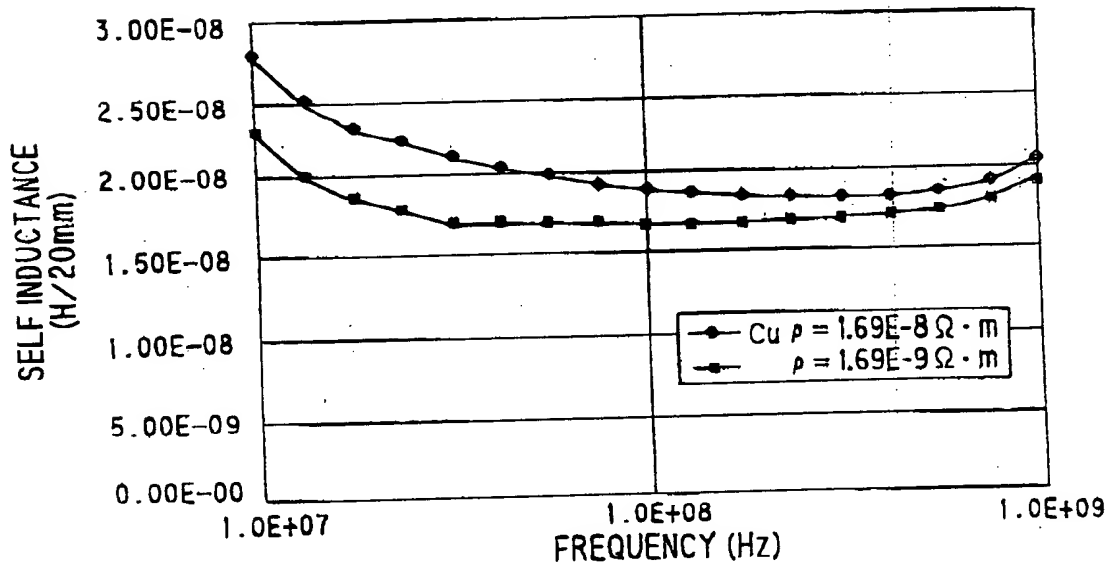


Approved
8/29/02

FIG. 8

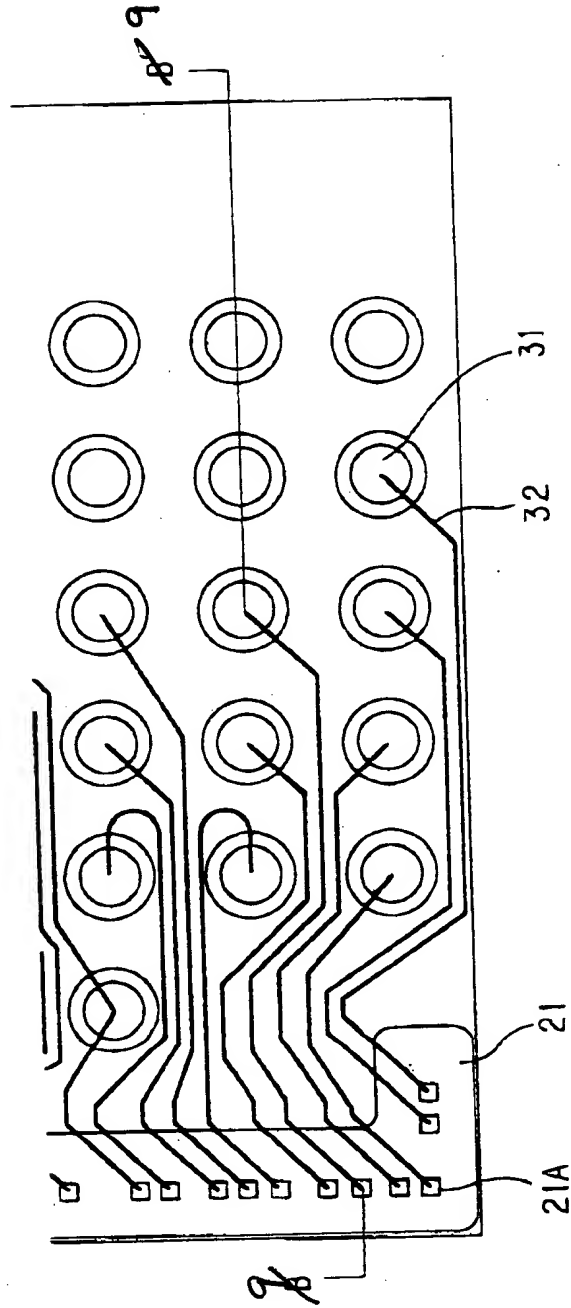


Ammon
2/25/02

FIG. 10

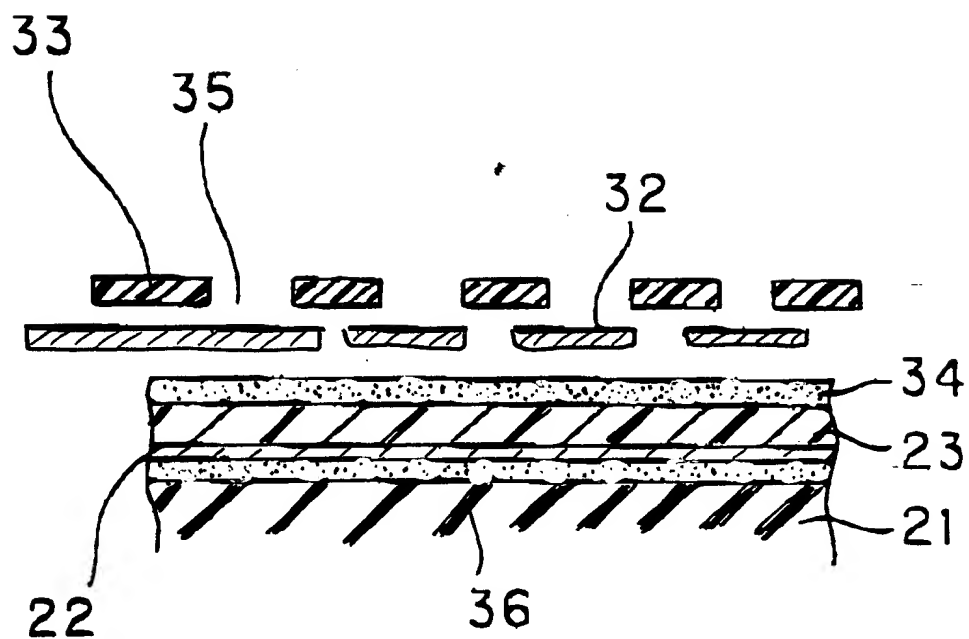


Approved
for
signature

FIG. 16(A)

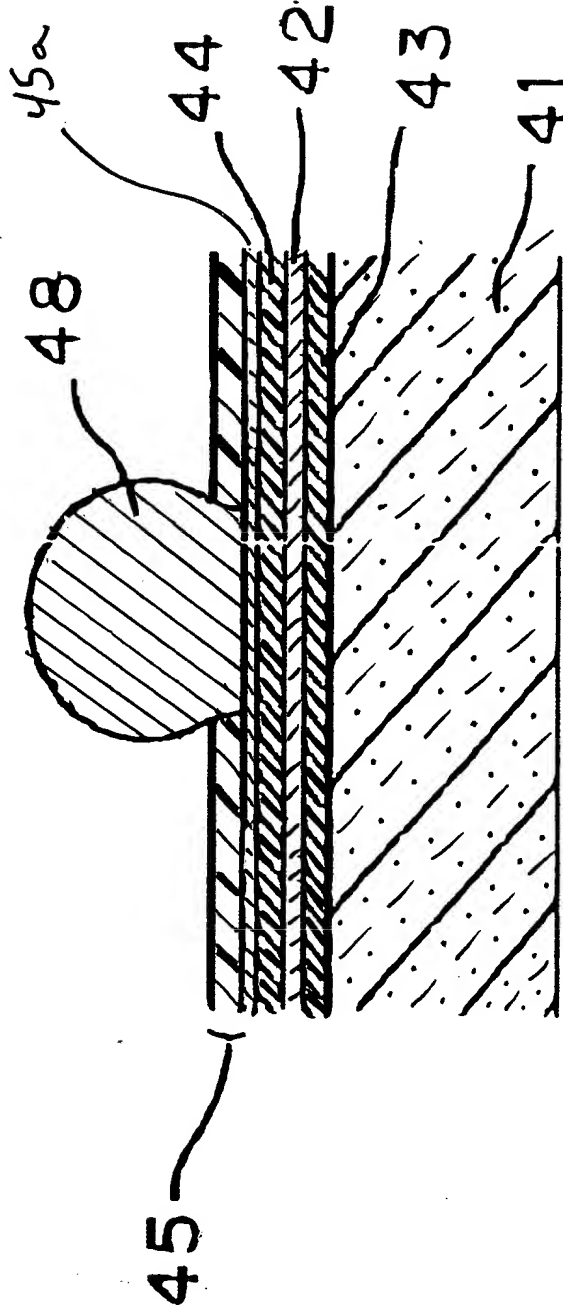

Continued
the
operator

FIG. 16(B)

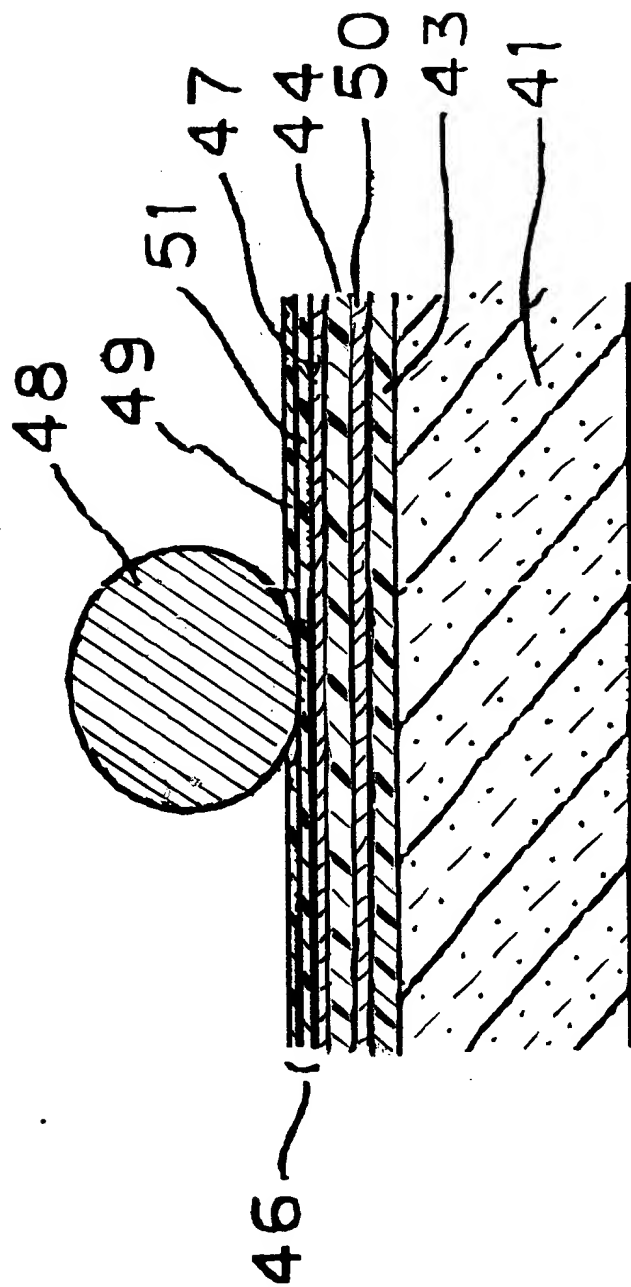

Revised
8/15/02

FIG. 19


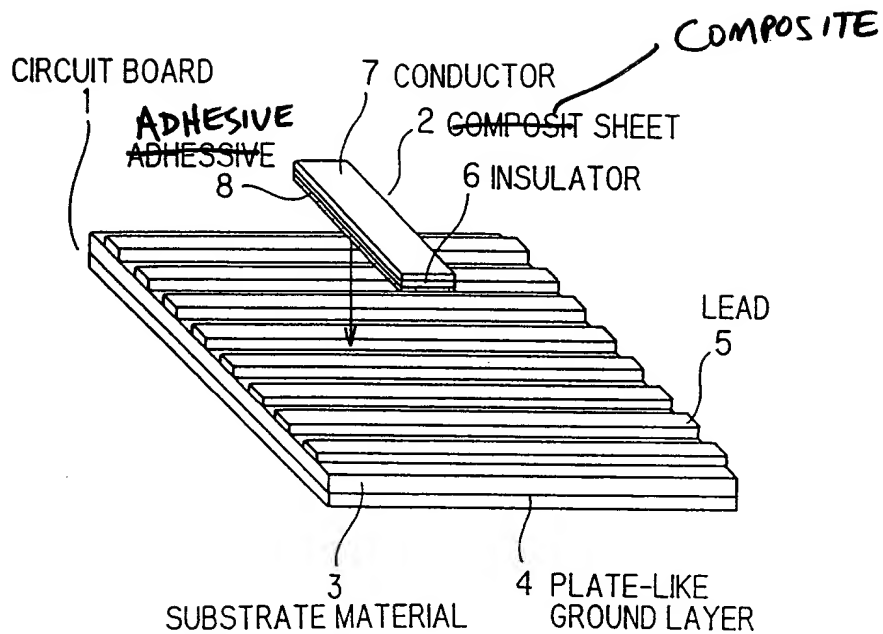


FIG. 20

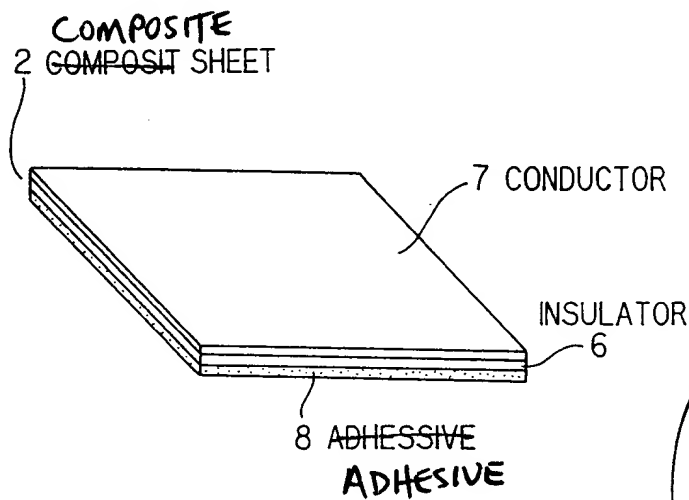

*Amended
PL
Sheet*